

Threaded Sleeve ▶ Standard Type / Tongueless Type / Self-tapping Slotted Type / Pin Type



Please order according to the diagram

①~③ Select the type and parameters in the order of for ordering

④ Standard Type.Coarse Thread

Model(①Code) — ②M — ③L
UXOAU — M3 — L4.5




Price Excluding Tax (¥/mm)


Discounted Price		
Quantity	1~9	10~
Price	100%	Separate Quotation

	Code	Type	Material		Surface Treatment
			National Standard	Equivalent	
	UXOAU	Standard Type	Coarse Thread	0Cr18Ni9	SUS304
	UXOBU		Fine Thread	—	—
	UXOCU	Tongueless Type	Coarse Thread	0Cr18Ni9	SUS304
	UXODC		—	Carbon Steel	Color-zinc Coated *
	UXODU	Self-tapping Slotted Type	Coarse Thread	0Cr18Ni9	SUS304
	UXOEU		—	—	—
	UXOFU	Pin Type	Thin-walled Type	Y1Cr18Ni9	SUS303
	UXOFU		Heavy Duty	—	—


Standard Type

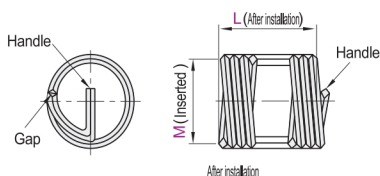


Tongueless Type




Self-tapping Slotted Type



Pin Type
Thin-walled Type
Heavy Duty

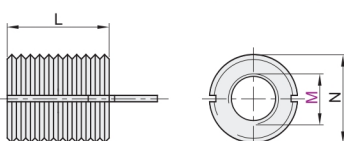

Suitable for 2 pins M4~M6

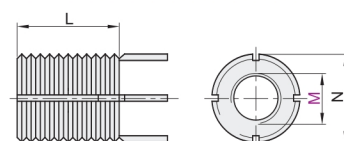

Suitable for 2 pins M4~M6

④ Standard Type.Coarse Thread

Model		L				Thread bottom hole diameter (reference)
Code	M					
UXOAU	3	3	4.5	6		3.2
	4	4	6	8		4.2
	5	5	7.5	10		5.2
	6	6	9	12		6.2
	8	8	12	16		8.3
	10	10	15	20		10.5
	12	12	18	24		12.5
	16	16	24	32		16.5

① M (coarse thread) and L refer to the dimensions after inserting into the threaded hole.

④ Tongueless Type

Model		L				Thread bottom hole diameter (reference)
Code	M					
UXOCU	2.5	2.5	3.8	5		2.6
	3	3	4.5	6		3.2
	4	4	6	8		4.2
	5	5	7.5	10		5.2
	6	6	9	12		6.3
	8	8	12	16		8.5
	10	10	15	20		10.5

④ Standard Type.Fine Thread

Model		L				Pitch	Thread bottom hole diameter (reference)
Code	M						
UXOBU	8	8	16	24		1.0	8.3
	10	10	15			1.0	10.5
		10	15	20		1.25	
	12	12	18			1.25	12.5

④ Self-tapping Slotted Type

Model		L				Thread bottom hole diameter (reference)
Code	M					
UXODC UXODU	3	6				4.5
	4	8				6
	5	10				7.5
	6	14				9
	8	15				11
	10	18				13
	12	22				15

④ Pin Type

Model		L	External thread N	Installation parameters		Removal parameters	
Code	M			Drill hole size	Bottom hole thread size	Drill hole size	
Thin-walled Type UXOEU	M5	8	M8×1.25	6.9	M8×1.25	5.5	4
	M6	10	M10×1.25	8.8	M10×1.25	7.5	
	M8	12	M12×1.25	10.8	M12×1.25	9.5	4.75
	M10	14	M14×1.5	12.8	M14×1.5	11.5	
	M12	16	M16×1.5	14.75	M16×1.5	13.5	
Heavy Duty UXOFU	M4	8	M8×1.25	6.9	M8×1.25	5.5	4
	M5	10	M10×1.25	8.8	M10×1.25	7.5	
	M6	12	M12×1.25	10.8	M12×1.25	9.5	
	M8	14	M14×1.5	12.8	M14×1.5	11.5	4.75
	M10	16	M16×1.5	14.75	M16×1.5	13.5	
	M12	18	M18×1.5	16.75	M18×1.5	15.5	
	M14	20	M20×1.5	18.75	M20×1.5	17.5	
	M16	22	M22×1.5	20.5	M22×1.5	17.75	6.35