

Metal gasket ▶ Standard type / Economic type • Thickness selection / Specified thickness

Regular type / Precision type



Please order according to the diagram

①~④ Select the type and parameters in the order of for ordering

Regular type.Thickness selection

Model(①Code) — ②D — ③V — ④T

FUBAA

D4

V2

T2




Discounted Price

Quantity Price 1~9 10~
100% Separate Quotation

Price Excluding Tax (Yuan)



CAD 2D 3D

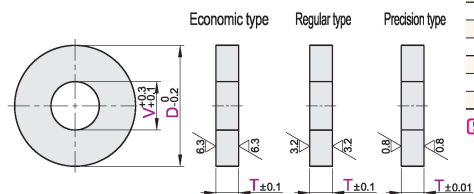

Code	Type	Sales method	Material National Standard	Equivalent	Hardness	Surface Treatment
FUABA	Economic type				—	Zinc Plated
FUBAA			45	S45C	43~48HRC	Black Oxide Finish
FUBAB					—	Electroless Nickel Plating
FUBAC					—	—
FUBAD					—	—
FUBAE			0Cr18Ni9	SUS304	43~48HRC	Electroless Nickel Plating
FUBCB					—	—
FUBCC			45	S45C	—	—
FUCAA			0Cr18Ni9	SUS304	—	—
FUCAB					—	—
FUCAC			45	S45C	43~48HRC	Black Oxide Finish
FUCAD					—	—
FUCAE			0Cr18Ni9	SUS304	43~48HRC	Electroless Nickel Plating
FUCAF			9Cr18Mo	SUS440C	43~48HRC	—
FUCBA					—	—
FUCBB			45	S45C	—	Black Oxide Finish
FUCBC					—	Electroless Nickel Plating
FUDCA			0Cr18Ni9	SUS304	—	—
FUDCB					—	—
FUDCC			45	S45C	—	Black Oxide Finish
FUDCB					—	Electroless Nickel Plating

① If rust prevention is required, stainless steel material or electroless nickel plating products are preferred.

Regular type

Model	D	V Selection	T Selection
5	3	1 2	2 3 4
6	3	1 2	2 3 4
8	3 4 5	1 2	2 3 4
10	3 4 5 8	1 2	2 3 4
12	4 5 6 8	1 2	2 3 4
14	4 5 6 8	2 3	2 3 4
15	4 5 6 8	2 3	2 3 4
16	5 6 8 10	2 3	2 3 4
20	6 8 10	2 3	2 3 4
25	8 10 12 15	2 3	2 3 4
30	8 10 12 15	2 3	2 3 4

Regular type.Thickness selection

Model	D	V Selection	T Selection
4	2 3	1 2 3	1 2 3
5	2 3 4	1 2 3	1 2 3
6	2 3 4	1 2 3	1 2 3
8	2 3 4 5	1 1.5 2 3 4 5 6	1 2 3 4 5
10	2 3 4 5 6	1 2 3 4 5	1 2 3 4 5
12	2 3 4 5 6 8	1.5 2 2.5 3 4 5 6 8	1 2 3 4 5 6 8
13	2 3 4 5 6 8 10	1 2 3 4 5 6 8	1 2 3 4 5 6 8
14	2 3 4 5 6 8 10	1.5 2 2.5 3 4 5 6 8	1 2 3 4 5 6 8
15	2 3 4 5 6 8 10	1 2 3 4 5 6 8	1 2 3 4 5 6 8
16	2 3 4 5 6 8 10	1.5 2 2.5 3 4 5 6 8	1 2 3 4 5 6 8
20	2 3 4 5 6 8 10 12 15 16	1 2 3 4 5 6 8 10 12 15 16	1 2 3 4 5 6 8 10 12 15 16
25	2 3 4 5 6 8 10 12 15 16 20	1 2 3 4 5 6 8 10 12 15 16 20	1 2 3 4 5 6 8 10 12 15 16 20
30	2 3 4 5 6 8 10 12 15 16 20 25	1 2 3 4 5 6 8 10 12 15 16 20 25	1 2 3 4 5 6 8 10 12 15 16 20 25
35	2 3 4 5 6 8 10 12 15 16 20 25	1 2 3 4 5 6 8 10 12 15 16 20 25	1 2 3 4 5 6 8 10 12 15 16 20 25
40	2 3 4 5 6 8 10 12 15 16 20 25 30	1 2 3 4 5 6 8 10 12 15 16 20 25 30	1 2 3 4 5 6 8 10 12 15 16 20 25 30
50	2 3 4 5 6 8 10 12 15 16 20 25 30	1 2 3 4 5 6 8 10 12 15 16 20 25 30	1 2 3 4 5 6 8 10 12 15 16 20 25 30
60	2 3 4 5 6 8 10 12 15 16 20 25 30	1 2 3 4 5 6 8 10 12 15 16 20 25 30	1 2 3 4 5 6 8 10 12 15 16 20 25 30

Regular type / Precision type.Thickness selection

Model	D	V Selection	T Selection
4	1 2	1 1.5 2 3 4	1 1.5 2 3 4
5	1 2 3	1 1.5 2 3 4	1 1.5 2 3 4
6	1 2 3 4	1 1.5 2 3 4	1 1.5 2 3 4
8	2 3 4 5 6	1 1.5 2 3 4 5	1 1.5 2 3 4 5
10	2 3 4 5 6 8	1 1.5 2 3 4 5	1 1.5 2 3 4 5
12	2 3 4 5 6 8 10	1 1.5 2 3 4 5	1 1.5 2 3 4 5
13	2 3 4 5 6 8 10	1 1.5 2 3 4 5	1 1.5 2 3 4 5
14	3 4 5 6 8 10	1 1.5 2 3 4 5	1 1.5 2 3 4 5
15	3 4 5 6 8 10 12	1 1.5 2 3 4 5	1 1.5 2 3 4 5
16	3 4 5 6 8 10 12 15 16	1 1.5 2 3 4 5	1 1.5 2 3 4 5
20	3 4 5 6 8 10 12 15 16 20	1 1.5 2 3 4 5	1 1.5 2 3 4 5
25	3 4 5 6 8 10 12 15 16 20 25	1 1.5 2 3 4 5	1 1.5 2 3 4 5
30	3 4 5 6 8 10 12 15 16 20 25	1 1.5 2 3 4 5	1 1.5 2 3 4 5
35	3 4 5 6 8 10 12 15 16 20 25	1 1.5 2 3 4 5	1 1.5 2 3 4 5
40	3 4 5 6 8 10 12 15 16 20 25 30 35	1 1.5 2 3 4 5	1 1.5 2 3 4 5
50	3 4 5 6 8 10 12 15 16 20 25 30 35 40	1 1.5 2 3 4 5	1 1.5 2 3 4 5
60	3 4 5 6 8 10 12 15 16 20 25 30 35 40	1 1.5 2 3 4 5	1 1.5 2 3 4 5

Regular type / Precision type.Specified thickness

Model	D	V Selection	T Selection
4	1 2	1 1.5 2 3 4	1 1.5 2 3 4
5	1 2 3	1 1.5 2 3 4	1 1.5 2 3 4
6	1 2 3 4	1 1.5 2 3 4	1 1.5 2 3 4
8	2 3 4 5 6	1 1.5 2 3 4 5	1 1.5 2 3 4 5
10	2 3 4 5 6 8	1 1.5 2 3 4 5	1 1.5 2 3 4 5
12	2 3 4 5 6 8 10	1 1.5 2 3 4 5	1 1.5 2 3 4 5
13	2 3 4 5 6 8 10	1 1.5 2 3 4 5	1 1.5 2 3 4 5
14	3 4 5 6 8 10	1 1.5 2 3 4 5	1 1.5 2 3 4 5
15	3 4 5 6 8 10 12	1 1.5 2 3 4 5	1 1.5 2 3 4 5
16	3 4 5 6 8 10 12	1 1.5 2 3 4 5	1 1.5 2 3 4 5
20	3 4 5 6 8 10 12 15 16	1 1.5 2 3 4 5	1 1.5 2 3 4 5
25	3 4 5 6 8 10 12 15 16 20	1 1.5 2 3 4 5	1 1.5 2 3 4 5
30	3 4 5 6 8 10 12 15 16 20 25	1 1.5 2 3 4 5	1 1.5 2 3 4 5

Regular type.Thickness selection(Bagged)

Model	D Selection	V	T Selection	Quantity per bag (PCS)
8	10 12	3	1 2	100
10	12 15	4	2 3	100
12	15 20	5	2 3	100
15	20 25	6	2 3	100
20	25 30	8	3	50
25	30 35	10	3	50