Ball Bushing Sleeve for Micro Ball Bushing Guidance Assembly

Please order according to the diagram

❶~❸ Select the type and parameters in the order of for ordering

Model (❶Code)	–	❷Specification	–	❸L
GSGRJ	–	3	–	L10

Price Excluding Tax (Yuan)

Discounted Price

Quantity	1~9	10~
Price	100%	Separate Quotation

Custom-made / Inventory

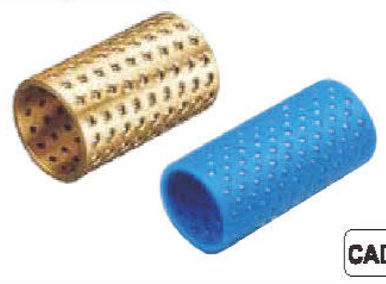

CAD 2D 3D

Code	Type	Material		Ball hardness
		Ball	Retainer	
GSGRJ	Standard Type	SUJ2	Polyacetal	58HRC~
GSGRM		SUS440C		56HRC~
GSGRL				
GSGSO	Compact Type	SUJ2	Copper	58HRC~
GSGSN		SUS440C		56HRC~

Standard Type

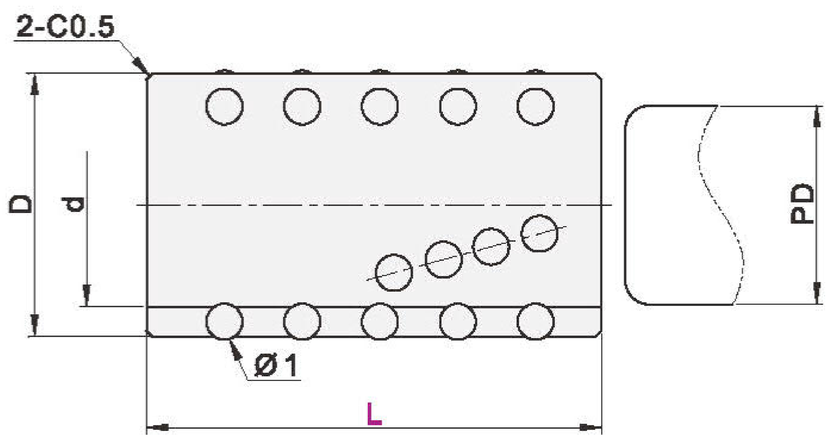

Compact Type

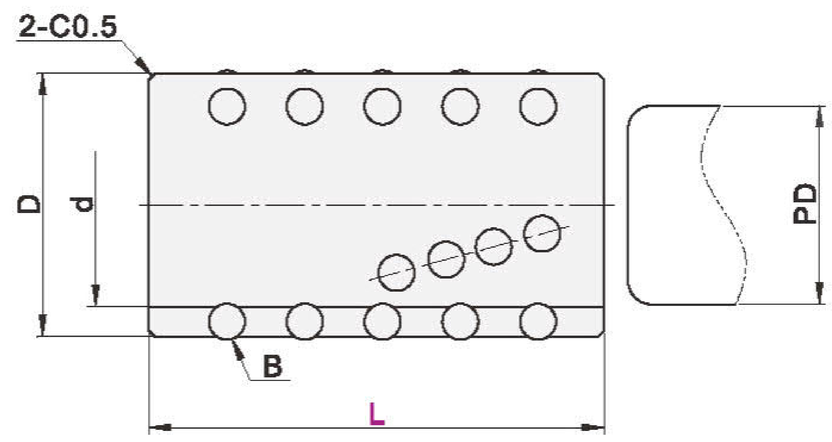

Standard Type

Model		L	PD	D	d
Code	Specification				
GSGRJ GSGRM GSGRL	3*	10 15 20	3	4.8	3.2
	4*	10 15 20	4	5.8	4.2
	5	10 15 20	5	6.8	5.2
	6	15 20 30	6	7.8	6.2
	8	15 20 30	8	9.8	8.2
	10	20 30 40	10	11.8	10.2
	12	20 30 40	12	13.8	12.2

Specifications with * are not applicable GSGRL .

Compact Type

Model		L	PD	D	d	B
Code	Specification					
GSGSO GSGSN	2	10 15 20	2	3.1	2.1	0.6
	3	10 15 20	3	4.1	3.1	
	4	10 15 20	4	5.1	4.1	
	5	10 15 20	5	6.1	5.1	
	6	15 20 30	6	7.1	6.1	
	8	15 20 30	8	9.1	8.1	
	10	20 30 40	10	11.8	10.2	1.0
	12	20 30 40	12	13.8	12.2	