Circular Posts ► Standard Type · With Spanner Slot Type
Both Ends External Thread Type · Thread Length Specified Type

Please order according to the diagram

❶~❼ Select the type and parameters in the order for ordering.

Model(❶Code)	❷D	❸L	❹F	❺G	❻M	❼N	AC LD()
KPECP	D6	L60	F30	G25	M4	N5	AC

Optional Processing

Price Excluding Tax (Yuan)

DiscoUnitted Price

Quantity	1~9	10~
Price	100%	Separate Quotation

Standard Type

Code	Type		Material International	Material Equivalent	Surface Treatment
KPECP	Thread Length Specified Type	Standard Type	Q235	SS400	—
KPECQ					Black Oxide Finish
KPECR					Electroless Nickel Plating
KPECS			0Cr18Ni9	SUS304	—

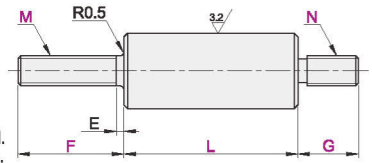

L	Tolerance
15~300	±0.2
300.5~600	±0.3
600.5~1020	±0.4

❶ Q235 materials are shipped with rust-preventive oil applied.
❶ Optional Processing Details are provided in the following table.

Model Code	D	Minimum Unit 0.5 L	F	G	M	N	E
KPECP KPECQ KPECR KPECS	5	15.0~60.0	5.0~25.0	5.0~25.0	2.6 3	2.6 3	1.0
	6		5.0~30.0	5.0~30.0	3 4	3 4	
	8	20.0~160.0	8.0~40.0	8.0~40.0	4 5	4 5	1.6
	10	20.0~360.0	8.0~45.0	8.0~45.0	4 5 6	4 5 6	2.0
	12	25.0~420.0	10.0~55.0	10.0~55.0	5 6 8	5 6 8	2.5
	15	30.0~520.0	12.0~60.0	12.0~60.0	6 8 10	6 8 10	3.0
	20	40.0~520.0	15.0~75.0	15.0~75.0	6 8 10 12	6 8 10 12	3.5
	25	55.0~620.0	20.0~80.0	20.0~80.0	6 8 10 12 16	6 8 10 12 16	4.0
	30	65.0~720.0	25.0~90.0	25.0~90.0	6 8 10 12 16 20	6 8 10 12 16 20	5.0
	35	80.0~820.0	30.0~100.0	30.0~100.0	8 10 12 16 20 24	8 10 12 16 20 24	
	40	80.0~920.0	35.0~110.0	35.0~110.0	10 12 16 20 24	10 12 16 20 24	6.0
	50	80.0~1020.0	40.0~120.0	40.0~120.0	12 16 20 24	12 16 20 24	

❶~❽ Select the type and parameters in the order for ordering.

Model(❶Code)	❷D	❸L	❹F	❺G	❻SC	❼M	❽N	AC LD()
KPEDP	D6	L60	F30	G25	SC50	M4	N4	AC

Please order according to the diagram

Price Excluding Tax (Yuan)

DiscoUnitted Price

Quantity	1~9	10~
Price	100%	Separate Quotation

With Spanner Slot Type

Code	Type		Material International	Material Equivalent	Surface Treatment
KPEDP	Thread Length Specified Type	With Spanner Slot Type	Q235	SS400	—
KPEDQ					Black Oxide Finish
KPEDR					Electroless Nickel Plating
KPEDS			0Cr18Ni9	SUS304	—

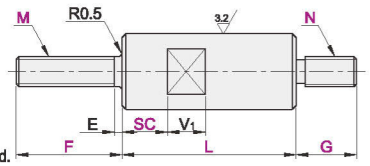

L	Tolerance
15~300	±0.2
300.5~600	±0.3
600.5~1020	±0.4

❶ Q235 materials are shipped with rust-preventive oil applied.

Model Code	D	Minimum Unit 0.5 L	F	G	SC	M	N	W	V1	E
KPEDP KPEDQ KPEDR KPEDS	5	15.0~60.0	5.0~25.0	5.0~25.0	0~50.0	2.6 3	2.6 3	4	10	1.0
	6		5.0~30.0	5.0~30.0		3 4	3 4	5		
	8	20.0~160.0	8.0~40.0	8.0~40.0	0~150.0	4 5	4 5	7		1.6
	10	20.0~360.0	8.0~45.0	8.0~45.0	0~350.0	4 5 6	4 5 6	8		2.0
	12	25.0~420.0	10.0~55.0	10.0~55.0	0~408.0	5 6 8	5 6 8	10	12	2.5
	15	30.0~520.0	12.0~60.0	12.0~60.0	0~508.0	6 8 10	6 8 10	13		3.0
	20	40.0~520.0	15.0~75.0	15.0~75.0		6 8 10 12	6 8 10 12	17		3.5
	25	55.0~620.0	20.0~80.0	20.0~80.0	0~610.0	6 8 10 12 16	6 8 10 12 16	22		4.0
	30	65.0~720.0	25.0~90.0	25.0~90.0	0~705.0	6 8 10 12 16 20	6 8 10 12 16 20	27	16	5.0
	35	80.0~820.0	30.0~100.0	30.0~100.0	0~805.0	8 10 12 16 20 24	8 10 12 16 20 24	30		
	40	80.0~920.0	35.0~110.0	35.0~110.0	0~900.0	10 12 16 20 24	10 12 16 20 24	36	20	6.0
	50	80.0~1020.0	40.0~120.0	40.0~120.0	0~1000.0	12 16 20 24	12 16 20 24	41		

Optional Processing

Code	Technical Specification
AC	**Addition of Undercut**  Selection Method AC Processing A Dimension Root Undercut

Code	Technical Specification
LD()	**Addition of Through Hole for Hexagonal Spanner**  Selection Method LD35 ❶ Minimum Unit 1 ❶ Scope of Application:D8~30 ❶ When specifying d dimension, please note the LD dimension to avoid interference or contact with screw holes.

D	d	Wrench Flat
8	2.5	2
10	3	2.5
12	3.5	3
15	4.6	4
20	5.8	5
25	6.9	6
30	9.2	8