

Circular Posts ▶ Standard Type · With Spanner Slot Type

Stepped Type Both Ends External Thread Type



Please order according to the diagram

①~④ Select the type and parameters in the order for ordering. ■ Optional Processing

Model(①Code) — ②D — ③L — ④M.N — (LC/LD() MC() . NC())


KPFEP — D8 — L160 — M4-N4 — LC



Disc/Unit Price
Quantity 1~9 10~
Price 100% Separate Quotation
Price Excluding Tax (Yen)



CAD 3D

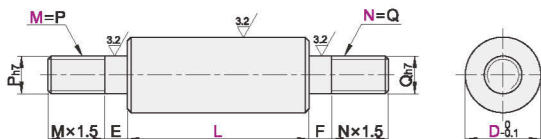

L	Tolerance
20~300	±0.2
300.5~600	±0.3
601~720	±0.4

① Q235 materials are shipped with rust-preventive oil applied.

Code	Type			Material		Surface Treatment
				International	Equivalent	
KPFEP	Stepped Type	Both Ends External Thread Type	Standard Type	Q235	SS400	Black Oxide Finish
KPFEQ						Electroless Nickel Plating
KPFER						
KPFES				0Cr18Ni9	SUS304	—

Standard Type

Code	Model	Minimum Unit 1	M·N	E	F
KPFEP KPFEQ KPFER KPFES	D	L			
	8	20~160	3 4 5	4	4
	10	20~360	4 5 6	5	5
	12	25~420	5 6 8	6	6
	15	30~520	6 8 10	8	8
	20	40~520	6 8 10 12	10	10
	25	60~620	6 8 10 12 16	12	12
	30	60~720	6 8 10 12 16 20	16	16



Please order according to the diagram

①~⑦ Select the type and parameters in the order for ordering. ■ Optional Processing

Model(①Code) — ②D — ③L — ④SC — ⑤M.N — ⑥G — ⑦H — (LC/LD() MC() . NC())


KPFFP — D8 — L160 — SC150 — M4-M4 — G3 — H3 — LC



Disc/Unit Price
Quantity 1~9 10~
Price 100% Separate Quotation
Price Excluding Tax (Yen)



CAD 3D

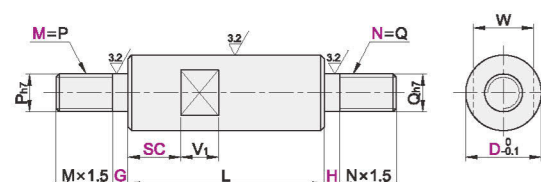

L	Tolerance
20~300	±0.2
300.5~600	±0.3
601~720	±0.4

① Q235 materials are shipped with rust-preventive oil applied.

Code	Type			Material		Surface Treatment
				International	Equivalent	
KPFFP	Stepped Type	Both Ends External Thread Type	With Spanner Slot Type	Q235	SS400	—
KPFFQ						Black Oxide Finish
KPFFR						Electroless Nickel Plating
KPFFS						—
				0Cr18Ni9	SUS304	

With Spanner Slot Type

Code	Model	Minimum Unit 1	M·N	Minimum Unit 1	W	V1
	D	L	SC	G	H	
KPFFP KPFFQ KPFFR KPFFS	8	20~160	0~150	2~4	2~4	7
	10	20~360	0~350	2~5	2~5	8
	12	25~420	0~408	2~6	2~6	10
	15	30~520	0~508	2~8	2~8	13
	20	40~520		2~10	2~10	17
	25	60~620	0~610	2~12	2~12	22
	30	60~720	0~705	2~16	2~16	27

Optional Processing

Code	Technical Specification
LC	Change L Dimension Tolerance Selection Method LC ① L size tolerance L20~300 Change to: ±0.05 L300.5~720 Change to: ±0.10
	Change in M·N Thread Portion Length Selection Method MC10 ① Minimum Unit 0.1

Code	Technical Specification
LD()	Addition of Through Hole for Hexagonal Spanner Selection Method LD35 ① Minimum Unit 1 ② When specifying d dimension, please note the LD dimension to avoid interference or contact with screw holes.