

Rotary Shaft ▶ Standard Type Straight Rod Type



Please order according to the diagram

①~③ Select the type and parameters in the order of for ordering

g6

Optional Processing

Model(①Code) — ②D — ③L — LA() LB() KE() KB() KC() KD()

NABAH

D2

L50

KB




Discounted Price

Quantity 1~9 10~
Price 100% Separate Quotation

Price Excluding Tax (Yuan)



Code	Type	D Tolerance	Material		Surface Treatment
			International	Equivalent	
NABAH	Standard Type	g6	45	S45C	Black Oxide Finish
NABAJ			0Cr18Ni9	SUS304	Electroless Nickel Plating
NABAK			35CrMo	SCM435	Black Oxide Finish
ANBAW			Hardness28~33HRC		Electroless Nickel Plating
NABAX			45	S45C	Black Oxide Finish
NABBH	Standard Type	h7	0Cr18Ni9	SUS304	Electroless Nickel Plating
NABBJ			45	S45C	Black Oxide Finish
NABBK			0Cr18Ni9	SUS304	Electroless Nickel Plating
NABCH			45	S45C	Black Oxide Finish
NABCK			0Cr18Ni9	SUS304	Electroless Nickel Plating

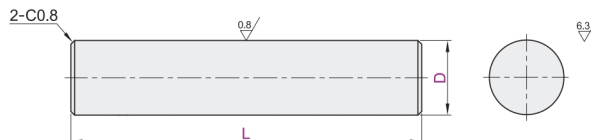

① For roundness, straightness, perpendicularity, and coaxiality, please refer to the rotary shaft product overview.

g6

①Code	Model	②Dg6	Minimum Unit 0.1
NABAH NABAJ NABAK ANBAW NABAX	2		12.0~50.0
	2.5	-0.002 -0.008	
	3		12.0~150.0
	4		12.0~200.0
	5	-0.004 -0.012	12.0~250.0
	6		18.0~300.0
	8	-0.005 -0.014	18.0~400.0
	10		18.0~500.0
	12		25.0~600.0
	13		25.0~700.0
	15	-0.006 -0.017	25.0~800.0
	16		25.0~800.0
	17		
	18		35.0~800.0
	20		
	22	-0.007 -0.020	45.0~800.0
	25		55.0~800.0
	30		65.0~800.0
	35	-0.009 -0.025	75.0~800.0
	40		95.0~800.0
	50		

h9

①Code	Model	②Dh9	Minimum Unit 0.1
NABCH NABCK NABCK	3	0 -0.025	12.0~150.0
	4		12.0~200.0
	5	0 -0.030	12.0~250.0
	6		18.0~300.0
	8	0	18.0~400.0
	10	-0.036	18.0~500.0
	12	0	25.0~600.0
	15	-0.043	25.0~700.0
	20		35.0~800.0
	25	0 -0.052	45.0~800.0
	30		55.0~800.0
	35	0	65.0~800.0
	40	0 -0.062	75.0~800.0
	50		95.0~800.0

h7

①Code	Model	②Dh7	Minimum Unit 0.1
NABBH NABBJ NABBK	6	0 -0.012	18.0~300.0
	8	0 -0.015	18.0~400.0
	10		18.0~500.0
	12	0	25.0~600.0
	15	0 -0.018	25.0~700.0
	20		35.0~800.0
	25	0 -0.021	45.0~800.0
	30		55.0~800.0
	35	0	65.0~800.0
	40	0 -0.025	75.0~800.0
	50		95.0~800.0

Optional Processing

Code	Technical Specification																																									
LA () LB ()	Add 1 flat surface LA () 	Selection Method LA10-G3 Selection Method LB10-J3-Y10-X3 ① Minimum Unit 1 ② When specifying G,J,X, it must be 50 or below ③ Applicable to the D specifications in the following table																																								
	Add 2 flat surface LB () 	<table><tr><th>D</th><th>H</th></tr><tr><td>3~5</td><td>0.5</td></tr><tr><td>6~17</td><td>1</td></tr><tr><td>18~40</td><td>2</td></tr><tr><td>50</td><td>3</td></tr></table>	D	H	3~5	0.5	6~17	1	18~40	2	50	3																														
D	H																																									
3~5	0.5																																									
6~17	1																																									
18~40	2																																									
50	3																																									
KE ()	Addition of wrench slots 	Selection Method KE5 ① Minimum Unit 1 ② Applicable to the D specifications in the right table.	<table><tr><th>D</th><th>W</th><th>V1</th></tr><tr><td>6</td><td>5</td><td></td></tr><tr><td>8</td><td>7</td><td>5</td></tr><tr><td>10</td><td>8</td><td></td></tr><tr><td>12</td><td>13</td><td></td></tr><tr><td>15</td><td>16</td><td>13</td></tr><tr><td>17</td><td>17</td><td>14</td></tr><tr><td>20</td><td>22</td><td>17</td></tr><tr><td>25</td><td>27</td><td></td></tr><tr><td>30</td><td>30</td><td>27</td></tr><tr><td>35</td><td>36</td><td>30</td></tr><tr><td>40</td><td>41</td><td>36</td></tr><tr><td>50</td><td>47</td><td>41</td></tr></table>	D	W	V1	6	5		8	7	5	10	8		12	13		15	16	13	17	17	14	20	22	17	25	27		30	30	27	35	36	30	40	41	36	50	47	41
	D	W	V1																																							
6	5																																									
8	7	5																																								
10	8																																									
12	13																																									
15	16	13																																								
17	17	14																																								
20	22	17																																								
25	27																																									
30	30	27																																								
35	36	30																																								
40	41	36																																								
50	47	41																																								
KB () KC ()	Add 1 keyway KB () 	Selection Method KB50-S10 Selection Method KC50-C8-K40-T10 ① Minimum Unit 1 ② When specifying S,T,C, it must be 100 or below ③ If three keyways are required, please select both KB and KC. ④ Applicable to Sizes Above D6 ⑤ For keyway details, see the product brief of the rotating shaft.																																								
	Add 2 keyway KC () 																																									
KD ()	Addition of slots for cam opening 	Selection Method KD10 ① Minimum Unit 1 ② Applicable to the D specifications in the right table.	<table><tr><th>D</th><th>d</th><th>V2</th></tr><tr><td>3</td><td>2</td><td></td></tr><tr><td>4</td><td>3</td><td>4</td></tr><tr><td>5</td><td>4</td><td></td></tr><tr><td>6</td><td>5</td><td></td></tr><tr><td>8</td><td>7</td><td></td></tr><tr><td>10</td><td>8</td><td>5</td></tr><tr><td>12</td><td>10</td><td></td></tr></table>	D	d	V2	3	2		4	3	4	5	4		6	5		8	7		10	8	5	12	10																
	D	d	V2																																							
3	2																																									
4	3	4																																								
5	4																																									
6	5																																									
8	7																																									
10	8	5																																								
12	10																																									

Rotary Shaft
14