

Post Clamps ▶ Different Diameter Parallel

Hole Pitch Selection Type / Hole Pitch Specified Type



Please order according to the diagram

①~③ Select the type and parameters in the order for ordering.

■ Hole Pitch Selection Type

Model(①Code) — ②D_{H7} — ③P
KZDPA — D10 — P20

■ Hole Pitch Specified Type

Model(①Code) — ②D_{H7} — ③P
KZDRA — D10 — P30



Discounted Price
Quantity 1~9 10~
Price 100% Separate Quotation
Price Excluding Tax (Yen)

Mounting Posts
Bases - Post Clamps
31



CAD 3D



Code	Type	Material International Equivalent	Surface Treatment	Accessory(Screws)
KZDPA	Hole Pitch Selection Type	Q235 SS400	Black Oxide Finish	Hex Socket Head Cap Screw
KZDPB			Electroless Nickel Plating	Hex Socket Head Cap Screw (Stainless Steel)
KZDQA			Black Oxide Finish	Hex Socket Head Cap Screw
KZDQB			Electroless Nickel Plating	Hex Socket Head Cap Screw (Stainless Steel)
KZDRA	Hole Pitch Specified Type	Q235 SS400	Black Oxide Finish	Hex Socket Head Cap Screw
KZDRB			Electroless Nickel Plating	Hex Socket Head Cap Screw (Stainless Steel)
KZDSA			Black Oxide Finish	Hex Socket Head Cap Screw
KZDSB			Electroless Nickel Plating	Hex Socket Head Cap Screw (Stainless Steel)

For rust prevention requirements, priority should be given to electroless nickel plated products


Standard Type D=10~12



Thin Type D=10~12

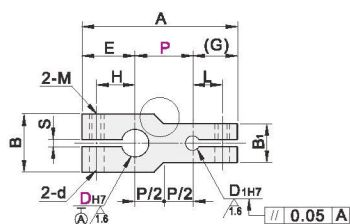

D=15~35



D=15~35



Step Detail Drawing



■ P Dimension Tolerance

P	Tolerance
10~30	±0.2
30~100	±0.3
100~160	±0.5

■ Hole Pitch Selection Type

Model	D _{H7}	P	A	B	B ₁	C	C ₁	E	G	H	L	N	M	d	S
Standard Type	10	8	15 20 25		16	12	16	9	15	14	9	8			
	12	10	15 20 25 30		22	16	22	12	18	15	12	9	11	M5	5.5
	15			A=P+E+G	28	22	28	16	22	19	15	12	14	M6	6.6
Thin Type	20	15	20 25 30 40		32	22	32	25	25	18	12	16			
	25	20	25 30 40 50		40	28	40	19	29	23	21	20		M8	9
	35	25	50 75 100 150		45	32	45	22	32	25	24	24			

■ Hole Pitch Specified Type

Model	D _{H7}	P	A	B	B ₁	C	C ₁	E	G	H	L	N	M	d	S
Standard Type	10	8	12~30		16	12	16	9	15	14	9	8			
	12	10	15~35		22	16	22	12	18	15	12	9	11	M5	5.5
	15			A=P+E+G	28	22	28	16	22	19	15	12	14	M6	6.6
Thin Type	20	15	20~45		32	22	32	25	25	18	12	16			
	25	20	25~55		40	28	40	19	29	23	21	20		M8	9
	30	25	30~80		45	32	45	22	32	25	24	24			
	35	25	50~160												