

Square Pull Handles/Rotary Pull Handle

Lightweight Type / Standard Type
Internal Mount Type / External Mount Type



Please order according to the diagram

①~③ Select the type and parameters in the order of for ordering.

① Lightweight Type

Model(①Code)

CCCAH

—

②L

L100

② Standard Type

Model(①Code)

CCBHF

—

②L

L110

—

③

Rubber Pad(Unspecified/Y)

Y



Discounted Price

Quantity 1~9 10~


Price 100% Separate Quotation

Price Excluding Tax (Yuan)

Lightweight Type



CAD 2D 3D




Code	Type	Material	Surface Treatment/Color
CCCAH	Lightweight Type	ZDC	Chrome Plating
CCCAJ			Scented Bronze Plating
CCCBO			Plastic Spraying (Black)

Model		L	L ₁	M	h	H	B	Reference Weight (kg/pcs)
Code								
CCCAH		100	111	M5	4	22.5	10	0.04
CCCAJ								
CCCBO								

Standard Type



CAD 2D 3D

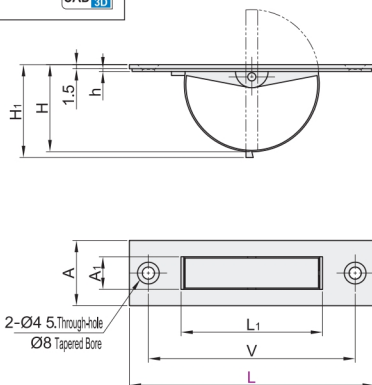


Code	Type	Material	Surface Treatment/Color
CCBHF	Standard Type	SUS304	—

Features: Suitable for use in locations such as electrical panels and access panels where protrusions on the surface are undesirable.

Applications: Control panels, distribution panels, access panels, etc.

Note: When installing vertically, please pay attention to correctly distinguishing the top and bottom.

Cutout Dimensions



Model		Rubber Pad	L ₁	V	A	A ₁	A ₂	H	H ₁	h	Cutout Dimensions		Reference Weight (kg/pcs)
Code	L										a	b	
CCBHF	90	Without Rubber Pad	52	76	24	12	11	32	36	1	60		0.04
	110	Unspecified(Without Rubber Pad) Y (With Rubber Pad)	64	94				38	42	1	74	20	0.05
	135	Without Rubber Pad	90	115	25	12.2	12	50	55	1.2	102		0.08