

Drag Chain ▶ Reinforced Bridge-type Drag Chain, Double-side Opening 35 Series



Please order according to the diagram

1-4 Select the type and parameters in the order of for ordering.

Model
Code Internal Height H1
EXBPG-35
Internal Width B1
50
Bending Radius R
R60
Number sections
16

Joint (Single Joint Model for Separate Purchase)

Model


EXBPG-35-38C




Discounted Price

Quantity 1-9 10-
Price 100% Separate Quotation


Price Excluding Tax (Yuan)

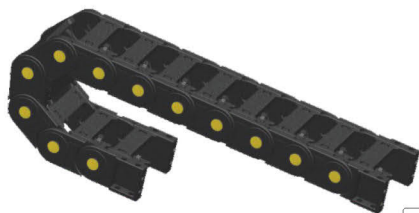

CAD 2D 3D



Suitable for Cables with a Diameter Below 32mm

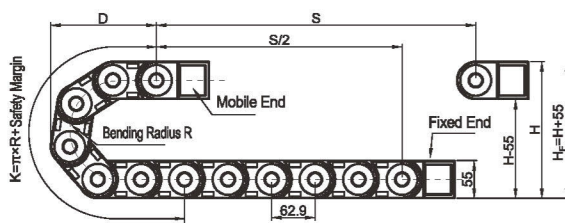


Pitch=62.9mm, Number of Links per Meter=16, Chain Length=S/2+K, S=Stroke Distance, K=π x R*“Safety Margin”
Actual Installation Height: H=H+55mm(Load 1kg/m)

R	H	D	K
60	175	186	315
75	205	201	362
100	255	226	440
125	305	251	519
150	355	276	597
175	405	301	676
200	455	326	754

Code	Type	How to open	Material	Color	Allowable Temperature	Accessories
EXBPG	Colorful Bridge-type	Internal Opening	PA6+GF30	Black	-20°C~120°C	Joint

⚠ Number of Links per Meter=1000+Pitch
⚠ Drag Chain Joints Sold as a Complete Set(Mobile End+Fixed End)

Schematic Diagram

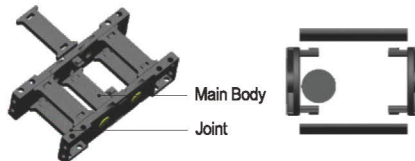


Main Body


Joint

Model		Internal Width B1	Bending Radius R	Style	External Height H2	External Width B2	Fixed Joint Type and Parameters									
Code	Internal Height H1						Aperture	Hole Spacing						F	Joint Model	
								A	B	C1	C2	D	E1	E2		
EXBPG	35	50	R60 R75 R100 R125 R150 R175 R200	L(Internal Opening)	55	73	6	24	66	77	79	26	16	17.5	78	EXBPG-35-50C
		60				83			76						88	EXBPG-35-60C
		75				98			91						103	EXBPG-35-75C
		90				113			106						118	EXBPG-35-90C
		100				123			116						128	EXBPG-35-100C
		125				148			141						153	EXBPG-35-125C
		130				153			146						158	EXBPG-35-130C
		150				173			166						178	EXBPG-35-150C
		175				198			191						203	EXBPG-35-175C
		200				223			216						228	EXBPG-35-200C
		250				273			266						278	EXBPG-35-250C
		300				323			316						328	EXBPG-35-300C

Fixed Joint Type and Parameters (see table above)




Compatible with Divider Plates



EXBPG-NY, N Indicates Universal, Y Indicates Divider Block

B1=175 Special for Crossbeam



EXBPG-175Y