

Eyebolts/Eye Nuts



Please order according to the diagram

①~② Select the-Type and parameters in the order of for ordering

① Eyebolts

Model(①Code) -

USESC

②M

M8

① Eye Nuts

Model(①Code) -

USFTC

②M

M8



Discounted Price

Quantity 1~9 10~

Price 100% Separate Quotation

Price Excluding Tax (Yuan)


① Eyebolts



CAD 2D

Code	Type	Material		Surface Treatment	Accessories
		International	Equivalent		
USESC	Eyebolts	Q235	SS400	Zinc Plated	One nut
USESU		0Cr18Ni9	SUS304	—	

① Applicable Standards for This Product : GB/T 825-1988
DIN 580-2010
JIS B 1168-1994

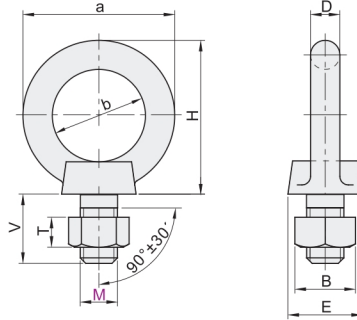

Model		Load (T)	Thread pitch P	a	b	D	E	H	V	Net weight	
Code	M									B	T
USESC USESU	6	0.14	1	36.3	19.7	8.3	20.3	36	13	10	5
	8		1.25					37.5		13	6.5
	10	0.23	1.5	45.3	24.7	10.3	25.3	46.5	17	17	8
	12	0.34	1.75	54.3	29.7	12.3	30.3	55	20.5	19	10
	14*	0.49	2	63	35	14	35	62	27	21	14
	16	0.7	2	63.3	34.7	12.5	35.3	64.5	27	24	13
	20	1.2	2.5	72.3	39.7	16.3	40.3	75	30	30	17

① Size with * is not applicable USESU.


① Eye Nuts



CAD 2D

Code	Type	Material		Surface Treatment
		International	Equivalent	
USFTC	Eye Nuts	Q235	SS400	Zinc Plated
USFTP		0Cr18Ni9	SUS304	—

① Applicable Standards for This Product : DIN 582-2010



Model		a	b	H	E	K
Code	M					
USFTC USFTP	8	36	20	36	20	8.5
	10	45	25	45	25	10
	12	54	30	53	30	11
	16	63	35	62	35	13
	20	72	40	71	40	16