

Mounted Bearing ▶ Standard flange type Non-retainer type



Please order according to the diagram

①~③ Select the type and parameters in the order of for ordering

Model(①Code) — Bearing Model — Seal ring
YCASO — 6902 — DD



Discounted Price

Quantity 1~9 10~
Price 100% Separate Quotation

Price Excluding Tax (¥/unit)



CAD 2D/3D


Type			Material		Surface Treatment
Round Flange Type	Square Flange Type	Opposite Edge Flange Type	Bearing	Bearing Housing	Bearing Housing
YCASO	YCATO	YCAUO	Steel	S45C	Black Oxide Finish
YCASP	YCATP	YCAUP			Electroless Nickel Plating
YCAST	YCATV	YCAUT			Natural Anodizing
YCASU	YCATU	YCAUV	Stainless Steel	A2017	—
YCASQ	YCATQ	YCAUQ		SUS304	—

■ Bearing accuracy: GB/T 307.10 Grade, Equivalent to JIS B 15140 Grade.

Round Flange Type

Square Flange Type

Opposite Edge Flange Type

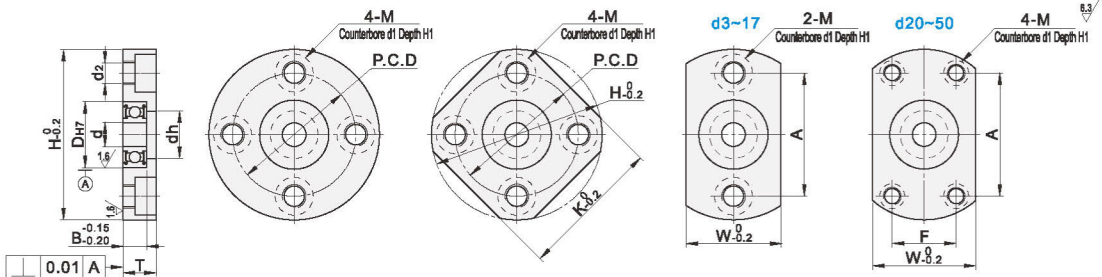

Code	Model	d	D _{H7}	B	H	W	T	dh	P.C.D	K	A	F	M (Thread Coarse Threaded) (d ₂)	d ₁	H ₁
Round Flange Type	623	3	10	+0.015	4	33	16	6	7	24	27	24	M4 (3.3)	6.5	3.6
	624	4	13		5	35	18	7	9	26	28	26			
	605	5	14	+0.018	5	36	20	7	10	28	31	28			
	625	5	16		6	38	22	8	12	28	31	28	M5 (4.3)	8	4.6
	606	6	17	+0.018	6	39	23	8	13	29	32	29			
	626	6	19	+0.021	6	41	25	8	15	31	34	31			
	678	8	12		3.5	34	18	6	10	25	27	25	M4 (3.3)	6.5	3.6
	698	8	19	+0.021	6	41	25	8	15	31	34	31			
	608	8	22		7	45	29	9	18	35	36	35			
	628	10	24	+0.018	8	47	32	10	20	37	37	37	M5 (4.3)	8	4.6
	6700	10	15		4	37	22	7.5	12	27	30	27			
	6800	10	19	+0.018	5	41	25	7.5	15	31	34	31			
Square Flange Type	YCASO	6900	22	+0.018	6	45	29	8	19	35	36	35	M5 (4.3)	8	4.6
	YCASP	6000	26		8	50	34	10	22	40	39	40			
	YCAST	6200	30		9	54	38	11	24	44	42	44			
	YCASU	6701	18		4	40	25	7.5	15	30	31	30	M6 (5.2)	9.5	5.6
	6801	12	21	+0.021	5	44	29	7.5	17	34	35	34			
	6901	12	24		6	48	31	8	21	38	38	38			
	6001	15	28	+0.025	8	52	36	10	24	42	40	42	M5 (4.3)	8	4.6
	6201	15	32		10	56	40	12	26	46	43	46			
	6702	15	21	+0.021	4	44	29	7.5	18	34	35	34			
	6802	15	24		5	47	32	7.5	20	37	37	37	M6 (5.2)	9.5	5.6
	YCATP	6902	28	+0.025	7	57	37	9	25	45	45	45			
	YCATV	6002	32		9	60	40	11	28	48	46	48			
Opposite Edge Flange Type	YCATU	6202	35	+0.025	11	64	44	13	29	52	49	52	M5 (4.3)	8	4.6
	YCATQ	6803	26		5	50	34	7.5	22	40	39	40			
	6903	17	30	+0.021	7	60	38	9	27	48	46	48			
	6003	17	35	+0.025	10	66	44	12	31	54	50	54	M6 (5.2)	9.5	5.6
	6203	20	40		12	72	50	14	34	60	54	60			
	YCAUO	6704	27	+0.021	4	51	35	7.5	23	41	39	32			
	YCAUP	6804	32		7	60	40	9	28	48	46	48	M8 (6.8)	11	6.6
	YCAUT	6904	37	+0.025	9	69	47	11	34	56	54	51			
	YCAUV	6004	42		12	77	54	14	36	64	59	56			
	YCAUQ	6204	47		14	81	58	16	40	68	62	59	M10 (8.5)	14	8.8
	6805	25	37		7	69	47	11	34	56	54	51			
	6905	25	42	+0.030	9	77	54	11	36	64	59	56			
	6005	30	47	+0.025	12	88	58	14	41	72	67	63	M8 (6.8)	11	6.7
	6205	30	52		15	94	64	17	45	78	72	68			
	6806	30	42		7	77	54	11	36	64	59	56			
	6906	30	47	+0.025	9	88	58	13	41	72	67	63	M10 (8.5)	14	8.8
	6006	30	55		13	96	66	15	48	80	73	70			
	6206	35	62		16	104	74	18	55	88	79	77			
	6007	35	72	+0.030	17	126	88	21	64	105	95	51	M12 (10.5)	17.5	11.2
	6207	40	68		15	114	82	17	60	96	85	80			
	6008	40	80		18	134	96	22	74	113	102	98			
	6208	50	16		16	134	96	20	74	113	102	98	M12 (10.5)	17.5	11.2
	6010	50	90	+0.035	20	147	110	24	83	126	104	72			
	6210	50	90		20	147	110	24	83	126	104	72			

※ VV(Non-contact rubber seal ring) is not applicable to bearings of model 623,624,605,606.

※ VV(Non-contact rubber seal ring),DD(Contact rubber seal ring), bearing material: steel.