

Idler Pulley for Flat Belt ▶ Arc Type

L=25~100



Please order according to the diagram

①~⑤ Select the type and parameters in the order of for ordering

Model(①Code) — ②D — ③d — ④L — ⑤H
VUKDV — D15 — d6 — L50 — H0.3



Price Excluding Tax (Yuan)


Quantity	Discounted Price	
	1~9	10~
Price	100%	Separate Quotation



CAD 2D/3D

□ Bearing accuracy: GB/T 307.1 Grade 0
Equivalent : JIS B 154 Grade 0

Code	Type	Material		Surface Treatment
		National Standard	Equivalent	
VUKDV	Arc Type	LF2	A5052	Natural Anodizing
VUKDP	Without Flange Type	Blue POM	Blue POM	—

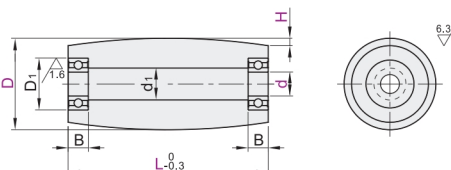

□ Bearing Adopted with Press-fit Method

Model		d	Minimum Unit 1 L	H	d ₁	Bearing size		
Code	D					Model	D ₁	B
VUKDV VUKDP	15	5	25~100	0.3	7	YHJ675ZZ	8	2.5
		6			9	YHJ676ZZ	10	3
	20	6			10	YHJ686ZZ	13	5
		8				YHJ678ZZ	12	3.5
	25	6			10	YHJ696ZZ	15	5
		8				YHJ688ZZ	16	
		8				YHJ698ZZ	19	
	30	10			15	YKY6900ZZ	22	6
		12				YKY6901ZZ	24	
		10				YKY6900ZZ	22	
	35	12			17	YKY6901ZZ	24	6
		15				YKY6902ZZ	28	7
		8				YHJ628ZZ	24	
	40	10			17	YKY6000ZZ	26	8
		12				YKY6901ZZ	24	6
		20			22	YKY6804ZZ	32	
		15			17	YKY6902ZZ	28	7

Model		d	Minimum Unit 1 L	H	d ₁	Bearing size		
Code	D					Model	D ₁	B
VUKDV VUKDP	50	10	25~100	0.3	17	YHY6200ZZ	30	9
		12			22	YKY6001ZZ	28	8
		15			17	YKY6902ZZ	28	7
		20				YKY6904ZZ	37	
	60	25			27	YKY6905ZZ	42	9
		12				YKY6201ZZ	32	10
		15			22	YHY6002ZZ	32	9
		20				YKY6904ZZ	37	
	80	25			32	YKY6905ZZ	42	9
		30				YKY6906ZZ	47	
		25				YKY6205ZZ	52	15
		30			41	YKY6006ZZ	55	13
		35				YKY6907ZZ		10