

Rubber Shock Absorber ▶ External Threads at Both Ends



Please order according to the diagram

①~③ Select the type and parameters in the order of for ordering.

④ Cylindrical type

Model(①Code) — ②Specification — ③M
MFEAE — 0808 — M3

⑤ Hourglass Shape

Model(①Code) — ②Specification — ③M
MFEBE — 2020 — M6



Discounted Price

Quantity 1~9 10~
Price 100% Separate Quotation

Price Excluding Tax (¥/unit)




Code	Type		Material		Rubber Hardness	Surface Treatment
			Rubber Body	Metal Parts		
MFEAE	Rubber Shock Absorber	Economy type	Natural Rubber	S45C	Shore A60	Zinc Plated
MFEBE						

① Due to the manufacturing process, a small amount of rubber/adhesive residue may occur, which does not affect the product's performance.


② As the product contains anti-aging additives, a slow and continuous efflorescence of white waxy substance on the product surface is a normal phenomenon and does not affect product performance.

④ Before and After Wax Efflorescence


Before Efflorescence




After Efflorescence



Cylindrical type

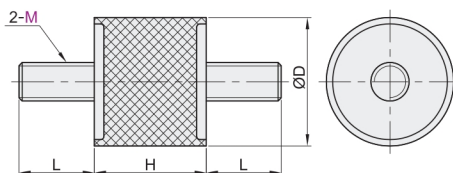

Hourglass Shape

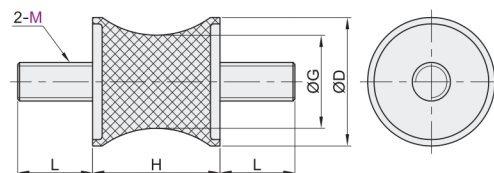

④ Cylindrical type

Code	Model		M	D	H	L	Optimal Load (KG)	Optimal Compression (mm)
	Specification							
MFEAE	0808	M3		8	8	6	8	1.5
	1010	M4		10			10	
	1510	M4			10			
	1510	M5		15		10	18	
	1515	M4			15			
	1520				20			
	2015				15			
	2020			20	20		25	2.0
	2030	M6			30	18		
	2520			25	20		33	
	2525			25	25			
	3015				15			
	3020			30	20	20	40	
	3025				25			
	3030	M8			30		50	2.5
	4020				20		48	2.0
	4030			40	30	23	60	2.5
	4040				40		72	3.0
	5020				20		56	2.0
	5030	M10		50	30	25	70	2.5
	5040				40			
	5050				50		85	3.0

④ Hourglass Shape

Code	Model		M	D	H	G	L	Optimal Load (KG)	Optimal Compression (mm)
	Specification								
MFEBE	2020	M6		20		14.5	18	15	
	2520			25	20	17		20	
	3020	M8		30		24	20	33	2.0
	4030			40	30	20	23	23	
	6060	M10		60	60	50	25	85	3.0

① Hourglass-shaped Shock Absorbers can be used to bear radial loads.