

Hex Socket Head Cap Screws (Boxed) ▶

Full Thread / Half Thread
Standard-Type



Please order according to the diagram

1~3 Select the-Type and parameters in the order of for ordering

Model(1Code) - (2M) - (3L)

UOBAO

M3

L18



Discounted Price

Quantity Price 1~9 10~
100% Separate Quotation



Price Excluding Tax (Yuan)



CAD 2D 3D

Applicable Standards for This Product : DIN 912-1983

Code	Type		Sales method	Material		Surface Treatment	Strength Grade
				International	Equivalent		
UOBAO	Standard Type	Full Thread / Half Thread	Boxed	ML40Cr		Black Oxide Finish	12.9
UOBAQ				0Cr18Ni9	SUS304		

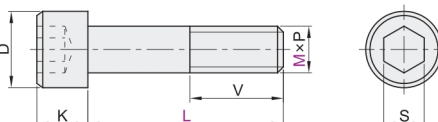

Model	Code	M	L	PCS/Box	V	P Thread pitch	D	K	S
(ML40Cr) UOBAO	3	6	2000						
		8							
		10							
		12	1000		Full Thread	0.5	5.5	3	2.5
		16							
		18							
		20							
		25							
		30							
	4	6	1000		Full Thread	0.7	7	4	3
		8							
		10							
		12							
		16							
		18							
	5	6	500		Full Thread	0.8	8.5	5	4
		8							
		10							
		12							
		16							
		18							
	6	6	500		Full Thread	1.0	10	6	5
		8							
		10							
		12							
		16							
		18							
	8	6	250		Full Thread	1.25	13	8	6
		8							
		10							
		12							
		16							
		18							

Model	Code	M	L	PCS/Box	V	P Thread pitch	D	K	S
(SUS304) UOBAQ	3	6	7000						
		8	2950						
		10	5500						
		12	4800		Full Thread	0.5	5.5	3	2.5
		16	4000						
		18	2220						
		20	3000						
		25	2400						
	4	6	3500		Full Thread	0.7	7	4	3
		8	1500						
		10	2750						
		12	2500						
		16	2000						
		18	2000						
	5	6	1600		Full Thread	0.8	8.5	5	4
		8	1500						
		10	1100						
		12	1500						
		16	1200						
		18	1200						
	6	6	750		Full Thread	1.0	10	6	5
		8	750						
		10	700						
		12	600						
		16	500						
		18	425						
	8	6	375		Full Thread	1.25	13	8	6
		8	300						
		10	275						
		12	500						
		16	500						
		18	425						