

Floating Joint ▶ Eccentric Type

Simplified Connection Type • Round Head Internal Thread Type



Please order according to the diagram

1~3 Select the type and parameters in the order of for ordering.

Model(1 Code) — 2 M — 3 Thread pitch

DQACQ — M3 — 0.5




Discounted Price

Quantity 1~9 10~
Price 100% Separate Quotation

Price Excluding Tax (Yuan)

❑ Eccentric Type

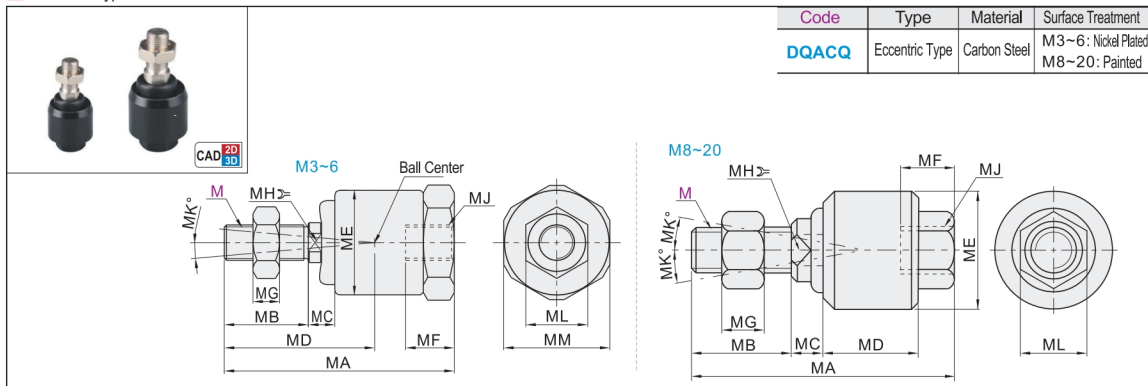

Code	Type	Material	Surface Treatment
DQACQ	Eccentric Type	Carbon Steel	M3~6: Nickel Plated M8~20: Painted

Model		Thread pitch	MA	MB	MC	MD	ME	MF	MG	MH	MJ	ML	MM	MK
Code	M													
DQACQ	3	0.5	23.5	7.5	3	15	11.8	5.5	2.4	4	M3×0.5	5.5	12	±5°
	4	0.7	26	9.5		17		6	3		M4×0.7	7		
	5	0.8									M5×0.8	8		
	6	1.0	34.5	13.5	3.5	22.8	13.8	8	4	6	M6×1.0	10	14	
	8		51	20	6	17	24	10.5		8	M8×1.25	12		13°
	10	1.25	58	22	7	21	26	11		10	M10×1.25	17		12°
	12				8		28	11.5	7	12	M12×1.25			
	14		70	22.5	8.5	28	34.5	16		15	M14×1.5	19	—	
	16		90					19	8	17	M16×1.5	23		
	18	1.5	92	27	10	41	44.5			18	M18×1.5	27		7°
	20		102	29	13	46	53	22	10	22	M20×1.5	26		10°



Please order according to the diagram

1~4 Select the type and parameters in the order of for ordering.

Model(1 Code) — 2 M — 3 Thread pitch — 4 L

DQBDG — M3 — 0.5 — L4




Discounted Price

Quantity 1~9 10~
Price 100% Separate Quotation

Price Excluding Tax (Yuan)

❑ Simplified Connection Type • Round Head Internal Thread Type

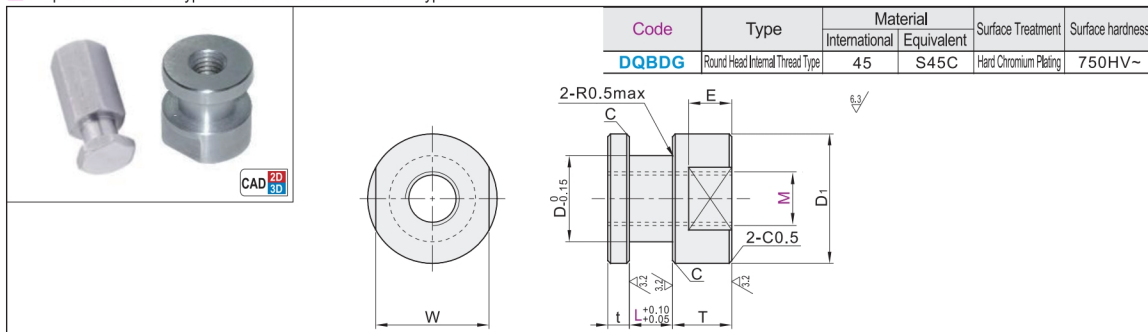

Code	Type	Material	Surface Treatment	Surface hardness
DQBDG	Round Head Internal Thread Type	International Equivalent 45 S45C	Hard Chromium Plating	750HV~

Model		Thread pitch	L	t	T	D	D1	W	E	C
Code	M									
DQBDG	3	0.5	4 5	3	5	6	9.5	8	3.5	0.2
	4	0.7	3 4 5		6	7		10	4.5	
	5	0.8	4 5 6		7	8	13.5	12	5.5	
	6	1.0	4 5 6 8		8	10	15.5	14	6.5	
	8	1.25	8 10	4	9	13	19.5	17	7.5	0.5
	10	1.25	8 10							
	12	1.5	8 10 12		11	16	23.5	21	9	
	14	1.5	12		12	18	25.5	22	10	
	16	1.5	12		13	21	29.5	27		
	18	1.5	12 15		15	25	34.5	30	12	