

Floating Joint (Single Piece/Assembly) ▶ Mounting Flange • Sliding Type Cylinder Connector • External Thread Type / Internal Thread Type



Please order according to the diagram

①~② Select the type and parameters in the order of for ordering.

Model(①Code) — ②M

DQOAH

M6



Price Excluding Tax (Yuan)

Discounted Price

Quantity 1~9 10~
Price 100% Separate Quotation




Code	Type		Material		Surface hardness	Surface Treatment
			International	Equivalent		
DQOAH DQOBH	Assembly	—	45	S45C	Part 43~48HRC Surface High-Frequency Quenching	Black Oxide Finish
DQRAH DQRBH		—				


Features:

- Adjustable allowance of eccentricity by freely adjusting the mounting spacing.
- Easy installation and removal by sliding, suitable for applications requiring frequent maintenance.


Assembly
Internal Thread Type




External Thread Type




Single Piece
Mounting Flange

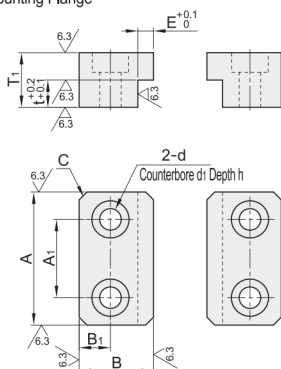

Cylinder Connector
Internal Thread

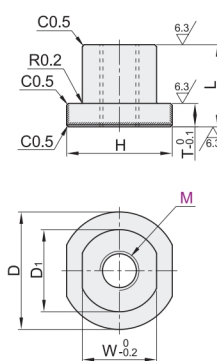

External Thread

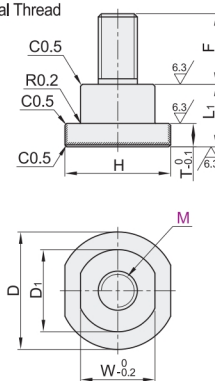

Model		Cylinder Connector										Mounting Flange											
		Internal Thread		External Thread				D	D ₁	H	T	W	A	A ₁	B	B ₁	E	t	T ₁	d	d ₁	h	C
Code	M	MxThread pitch	L	MxThread pitch	L ₁	F																	
Assembly Internal Thread Type DQOAH	6	M6×1.0	14	M6×1.0	11	13	20	14	18	4	12	22	12	14	6	3	4	8	4.5	7.8	4.5		2
	8	M8×1.25	17	M8×1.25	14	15	23	16	20	5	14	25	14				5	11					
External Thread Type DQOBH	10	M10×1.25	21	M10×1.5	16	18	30	21	27	6	19	34	20	19	8	4	6	13	5.5	9.3	5		
	14	M14×1.5	25	—	—	—	38	27	34	7	24	42	26	22	9	5	7	15	6.5	10.8	6.5		
Single Piece Cylinder Connector DQRAH	16	—	—	M16×2.0	19	30																	
	18	M18×1.5	28	—	—	—	45	32	40	8	30	48	30	25	10	5	8	15	10	13.8	8		3
Mounting Flange DQRBH	20	—	—	M20×2.5	20	32																	
	22	M22×1.5	33	M22×2.5	23	35	56	40	50	10	36	60	38	28	11	7	10	18					