

Drag Chain ▶ Small Bridge-type Drag Chain, Non-openable 10 Series



Please order according to the diagram

①~④ Select the type and parameters in the order of for ordering.

① Model
Code Internal Height H1
EXAPD - 10 — **10** — **R18** — **16**
② Internal Width B1
③ Bending Radius R
④ Number sections

Joint (Single Joint Model for Separate Purchase)

Model
EXAPD-10-10C



Discounted Price
Quantity Price 1~9 10~
100% Separate Quotation
Price Excluding Tax (Yen)





CAD 2D 3D


Code	Type	How to open	Material	Color	Allowable Temperature	Accessories
EXAPD	Bridge-type	Non-openable	PA6+GF30	Black	-20°C~120°C	Joint

- ⚠ Number of Links per Meter=1000÷Pitch
- ⚠ Drag Chain Joints Sold as a Complete Set(Mobile End+Fixed End)

Schematic Diagram

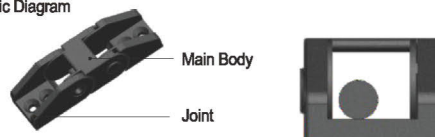

Suitable for Cables with a Diameter Below 9mm

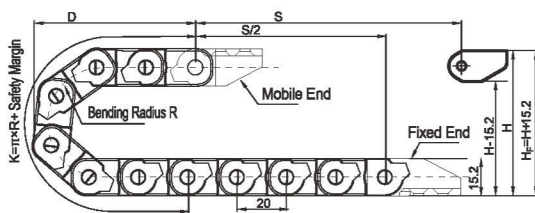

R	H	D	K
18	51.2	58	97
28	71.2	68	128
38	91.2	78	160

Pitch=20mm, Number of Links per Meter=50, Chain Length=S/2+K, S=Stroke Distance, K=π x R*“Safety Margin”
Actual Installation Height: H_i=H+15.2mm(Load 0.2kg/m)

Model		Internal Width B _i	Bending Radius R	Style	External Height H _e	External Width B _e	Fixed Joint Type and Parameters						
							Aperture	Hole Spacing					Joint Model
Code	Internal Height H _i							A	B	C ₁	C ₂	F	
EXAPD	10	10	R18 R28 R38	B(Non-openable)	15.2	17	5.2*3.5	8	6	31	29	17	EXAPD-10-10C
		22				7*4	10	7	22			EXAPD-10-15C	
		27							27			EXAPD-10-20C	

Fixed Joint Type and Parameters (see table above)

