

Drag Chain ▶ Small Semi-closed Drag Chain, Non-openable 10 Series



Please order according to the diagram

①-④ Select the type and parameters in the order of for ordering.

① Model
Code Internal Height H1
EXAPF - 10 — Internal Width B1
15 — Bending Radius R
R28 — Number sections
16

Joint (Single Joint Model for Separate Purchase)

Model
EXAPF-10-15C



Discounted Price
Quantity 1~9 10~
Price 100% Separate Quotation
Price Excluding Tax (Yen)




CAD 2D 3D

Code	Type	How to open	Material	Color	Allowable Temperature	Accessories
EXAPF	Semi-closed	Non-openable	PA6+GF30	Black	-20°C~120°C	Joint



- ⚠ Number of Links per Meter=1000÷Pitch
- ⚠ Drag Chain Joints Sold as a Complete Set(Mobile End+Fixed End)

Schematic Diagram




Main Body

Joint

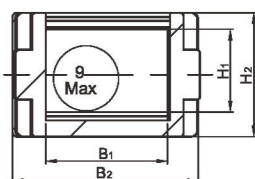

Suitable for Cables with a Diameter Below 9mm

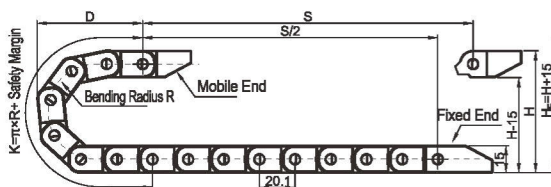

R	H	D	K
28	71	69	129

Pitch=20.1mm, Number of Links per Meter=50, Chain Length=S/2+K, S=Stroke Distance, $K=\pi \times R \times \text{Safety Margin}$
Actual Installation Height: $H=H+15\text{mm}$ (Load 0.2kg/m)

Model		Internal Width B1	Bending Radius R	Style	External Height H2	External Width B2	Fixed Joint Type and Parameters						
							Aperture	Hole Spacing					Joint Model
Code	Internal Height H1							A	B	C1	C2	E	
EXAPF	10	15	R28	B(Non-openable)	15	22.5	6.3	10	2.8	28	30	7.6	EXAPF-10-15C

Fixed Joint Type and Parameters (see table above)

