

Drag Chain ▶ Small Semi-closed Drag Chain, Side-opening 15 Series



Please order according to the diagram

①~④ Select the type and parameters in the order of for ordering.

① Model
Code Internal Height H1
EXAPL - 15

② Internal Width B1
15

③ Bending Radius R
R28

④ Number sections
16

Joint (Single Joint Model for Separate Purchase)

Model
EXAPL-15-15C



Discounted Price
Quantity 1~9 10~
Price 100% Separate Quotation
Price Excluding Tax (Yen)



CAD 2D 3D

Code	Type	How to open	Material	Color	Allowable Temperature	Accessories
EXAPL	Semi-closed	Side-opening	PA6+GF30	Black	-20°C~120°C	Joint

⚠ Number of Links per Meter=1000÷Pitch
⚠ Drag Chain Joints Sold as a Complete Set(Mobile End+Fixed End)

Schematic Diagram



Main Body
Joint




(Inside width 15-40 data)


R	H	D	K
28	75.4	80	140
38	95.4	90	172
48	115.4	100	203

(Inside width 50 data)

R	H	D	K
28	75.4	72	132
38	95.4	82	164
48	115.4	92	195



Suitable for Cables with a Diameter Below 13mm

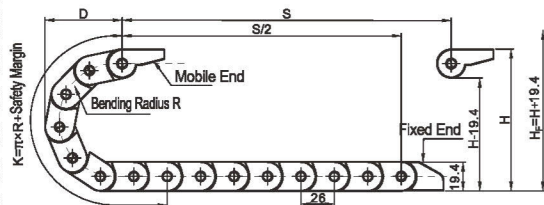

Pitch=26mm, Number of Links per Meter=39, Chain Length=S/2+K, S=Stroke Distance, K=π×R+"Safety Margin"
Actual Installation Height: H=H1+19.4mm (Load 0.3kg/m)

Model		Internal Width B1	Bending Radius R	Style	External Height H2	External Width B2	Fixed Joint Type and Parameters									
Code	Internal Height H1						Aperture	Hole Spacing							Joint Model	
							A	B	C	E1	E2	F	F1			
EXAPL	15	15	R28 R38 R48	CK(Side-opening)	19.4	23	4	8	1	28	12	7	24	-	EXAPL-15-15C	
		20				6.5		6.5			29.5	11	EXAPL-15-20C-1(Vertical Hole)			
		30				8		8			39.2	22	EXAPL-15-30C			
		40				7	7	49.2	27.5		EXAPL-15-40C					
		50				7	7	60	37		EXAPL-15-50C					

Fixed Joint Type and Parameters (see table above)

