

Drag Chain ▶ Bridge-type Drag Chain, Outward-opening 18 Series



Please order according to the diagram

①~④ Select the type and parameters in the order of for ordering.

① Model

Code Internal Height H1

EXAPR - 18

② Internal Width B1

25

③ Bending Radius R

R28

④ Number sections

16

Joint (Single Joint Model for Separate Purchase)

Model

EXAPR-18-25C



Discounted Price

Quantity 1~9 10~

Price 100% Separate Quotation

Price Excluding Tax (¥/m)




CAD 2D 3D

Code	Type	How to open	Material	Color	Allowable Temperature	Accessories
EXAPR	Bridge-type	Openable	PA6+GF30	Black	-20°C~120°C	Joint

⚠ Number of Links per Meter=1000÷Pitch


⚠ Drag Chain Joints Sold as a Complete Set(Mobile End+Fixed End)

Schematic Diagram




Main Body

Joint



Suitable for Cables with a Diameter Below 16mm


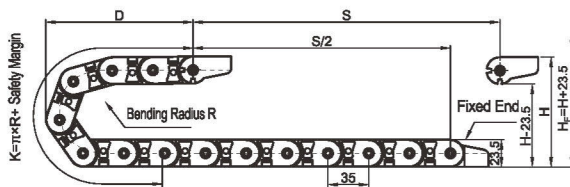


R	H	D	K
28	79	75	175
38	99	85	210
48	119	95	245
60	143	107	280

Pitch=35mm, Number of Links per Meter=29, Chain Length=S/2+K, S=Stroke Distance, K=π x R*“Safety Margin”
Actual Installation Height: H=H+23.5mm(Load 0.5kg/m)

Model		Internal Width B1	Bending Radius R	Style	External Height H2	External Width B2	Fixed Joint Type and Parameters									
							Aperture	Hole Spacing						F2	F3	Joint Model
Code	Internal Height H1							A	B3	B4	C	E	F1			
EXAPR	18	25	R28 R38 R48 R60	W(Openable)	23.5	35.5	5.3	10	19	14.4	33	7.5	2.2	35.5	33	EXAPR -18-25C

Fixed Joint Type and Parameters (see table above)

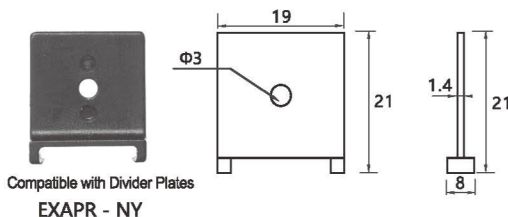

Compatible with Divider Plates
EXAPR - NY