

Flat Key ▶ Standard Type / Quenched Type / Economic Type



Please order according to the diagram




①~③ Select the type and parameters in the order of for ordering

Model(①Code) — ②B — ③L
UWAAC — B3 — L8



Discounted Price
Quantity 1~9 10~
Price 100% Separate Quotation
Price Excluding Tax (Yen)

Code	Type	Material		Hardness	Tensile Strength	Dimension Tolerance	
		National Standard	Equivalent			L	Tolerance
UWAAC	Standard Type	45	S45C	—	600N/mm ² Above	Shortest~10	0 -0.36
UWAAU		0Cr18Ni9	SUS304			11~18	0 -0.43
UWABC		45	S45C			19~30	0 -0.52
UWABU		0Cr18Ni9	SUS304			31~50	0 -0.62
UWACC	Quenched Type	45	S45C	25~40HRC	700N/mm ² Above	51~80	0 -0.74
UWACU		0Cr18Ni9	SUS304			81~110	0 -0.87
UWAAH	Economic Type	45	S45C	—	600N/mm ² Above		
E-UWAAC							
E-UWAAU							
E-UWAAH							

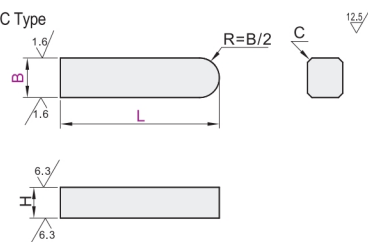

Standard Type

Code	Model	B	L	H	C
(S45C)	2	0 -0.05	6 8 10 15 20	2	0 -0.05
	3	0 -0.025	6 8 10 12 15 16 18 20 22 25 28 30 35 40 50	3	0 -0.025
	4	0	8 10 12 15 16 18 20 22 25 28 30 35 40 45 50 55	4	0
	5	0 -0.030	8 10 12 15 16 18 20 22 25 28 30 32 35 40 45 50 55 60 70	5	0 -0.030
A Type	6	0	8 10 12 15 16 18 20 22 25 28 30 32 35 40 45 50 55 60 70	6	0
UWAAC	7	0	8 10 12 15 16 18 20 22 25 28 30 32 35 40 45 50 55 60 70 80	7	0 -0.036
B Type	8	0 -0.036	10 12 15 16 18 20 22 25 28 30 32 35 40 45 50 55 60 65 70 80 85 90 100	8	0
	10	0	15 16 18 20 22 25 28 30 32 35 40 45 50 55 60 65 70 80 85 90 100	10	0 -0.090
UWABC	12	0	20 22 25 28 30 32 35 40 45 50 55 60 65 70 80 85 90 100	12	0
C Type	14	0	30 32 35 40 45 50 55 60 65 70 80 85 90 100	14	0
	15	0 -0.043	30 32 35 40 45 50 55 60 65 70 80 85 90 100	15	0 -0.090
	16	0	35 40 45 50 55 60 65 70 80 85 90 100	16	0
	18	0	35 40 45 50 55 60 65 70 80 85 90 100 110	18	0 -0.110

Code	Model	B	L	H	C
(SUS304)	2	0 -0.080	6 8 10 15 20	2	0 -0.080
	3	0 -0.025	6 8 10 12 15 16 18 20 22 25 28 30 35 40 50	3	0 -0.025
	4	0	8 10 12 15 16 18 20 22 25 28 30 35 40 45 50 55	4	0
	5	0 -0.030	8 10 12 15 16 18 20 22 25 28 30 32 35 40 45 50 55 60 70	5	0 -0.030
A Type	6	0	8 10 12 15 16 18 20 22 25 28 30 32 35 40 45 50 55 60 70	6	0
UWAAU	7	0	8 10 12 15 16 18 20 22 25 28 30 32 35 40 45 50 55 60 70 80	7	0 -0.036
B Type	8	0 -0.036	10 12 15 16 18 20 22 25 28 30 32 35 40 45 50 55 60 65 70 80 85 90 100	8	0
	10	0	15 16 18 20 22 25 28 30 32 35 40 45 50 55 60 65 70 80 85 90 100	10	0 -0.090
UWABU	12	0	20 22 25 28 30 32 35 40 45 50 55 60 65 70 80 85 90 100	12	0
C Type	14	0	30 32 35 40 45 50 55 60 65 70 80 85 90 100	14	0
	15	0 -0.043	30 32 35 40 45 50 55 60 65 70 80 85 90 100	15	0 -0.090
	16	0	35 40 45 50 55 60 65 70 80 85 90 100	16	0
	18	0	35 40 45 50 55 60 65 70 80 85 90 100 110	18	0 -0.110

Quenched Type

Code	Model	B	L	H	C
(S45C)	4	0	8 10 12 15 16 20 25 30	4	0
	5	0 -0.030	10 12 15 16 18 20 25 30 35 40 50	5	0 -0.03
	6	0	10 12 15 16 18 20 25 30 35 40 45 50	6	0
	7	0	15 20 25 30 35 40 45 50	7	0 -0.036
A Type	8	0 -0.036	15 20 25 30 35 40 45 50	8	0
UWAAH	10	0	15 20 25 30 35 40 45 50	10	0 -0.09
	12	0 -0.043	20 25 30 35 40 45 50	12	0

Economic Type

Code	Model	B	L	H	C
A Type	3	0 -0.025	10 12 20 25	3	0 -0.025
	4	0	10 12 16 20 25	4	0
	5	0 -0.030	10 12 16 18 20 25 30 40	5	0 -0.03
	6	0	20 25 30	6	0
B Type	8	0 -0.036	18 25 30	8	0 -0.09
	3	0 -0.025	10	3	0 -0.025
	4	0	12	4	0
	6	0 -0.030	10	6	0 -0.03
C Type	3	0 -0.025	10 12	3	0 -0.025
	4	0	16 20	4	0
	5	0 -0.030	20	5	0 -0.03
	6	0	30 40	6	0
E-UWAAC	8	0 -0.036	16	8	0 -0.09