

Straight Rod Type Negative Tolerance Dowel Pin ▶ Chamfer C Type • h7 One End Internal Thread Type • h7/g6



Please order according to the diagram

①~③ Select the type and parameters in the order of for ordering

■ Chamfer C Type

Model(①Code) — ②D — ③L
UXCFG — D3 — L8


■ One End Internal Thread Type .With Vent Slot

Model(①Code) — ②D — ③L
UXCGG — D6 — L15



Discounted Price
Quantity 1~9 10~
Price 100% Separate Quotation

Please Enquiry To Us!

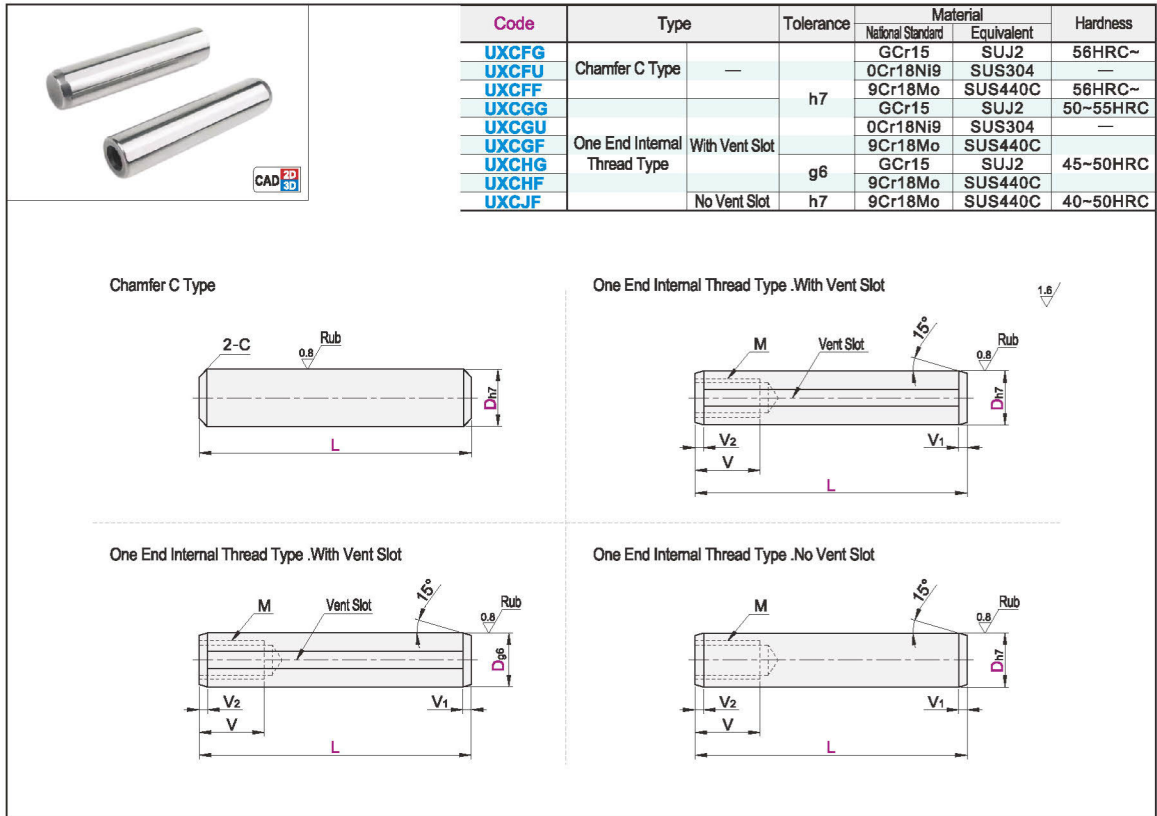

■ Chamfer C Type

Model	h7	L	C
Code	D		
UXCFG UXCFU UXCFF	2	6 8 10 12 15 20	0.3
	3	6 8 10 12 15 20	
	4	6 8 10 12 15 20 30	
	5	8 10 12 15 20 30	0.5
	6	8 10 12 15 20 30 35 40	
	8	12 15 20 30 35 40 50	

■ One End Internal Thread Type .With Vent Slot

Model		h7	L		M	V	V ₁	V ₂							
Code	D														
UXCGG UXCGU	5	0	10	15	20	25	30	35	40	45	3	6	2.0	0.5	
	6	-0.012	10	15	20	25	30	35	40	45	50	4	※8	2.5	1.0
	8		10	15	20	25	30	35	40	45	50	5	8		
	10	-0.015		15	20	25	30	35	40	45	50	6	10	3.0	1.5
	12	-0.018			20	25	30	35	40	45	50				

① ※当D=6、L=10时，V=6。

■ One End Internal Thread Type .With Vent Slot

Model	h7	L	M	V	V ₁	V ₂
Code	D					
UXCGF	5	10 15 20	3	6	1.5	0.3
	6	10 15 20 25 30	4	8	2	
	8	15 20 25 30 35 40	5	8	2	0.5
	10	30 35 40 45	6	10	2.5	

■ One End Internal Thread Type .With Vent Slot

Model		g6	L	M	V	V ₁	V ₂
Code	D						
UXCHG	5	-0.004	10 15 20	3	6	1.5	0.3
	6	-0.012	10 15 20 25 30	4	8	2	
	8	-0.005	15 20 25 30 35 40	5			0.5
	10	-0.014	20 25 30 35 40	6	10	2.5	
	12	-0.008	30 35 40 45				1

■ One End Internal Thread Type .With Vent Slot

Model	g6	L	M	V	V ₁	V ₂
Code	D					
UXCHF	5	10 15 20	3	6	1.5	0.3
	6	10 15 20 25 30	4	8	2	
	8	15 20 25 30 40	5	8	2	0.5
	10	20 25 30 40	6	10	2.5	

■ One End Internal Thread Type .No Vent Slot

Model		h7	L	M	V	V ₁	V ₂
Code	D						
UXCJF	5	0	10 15 20 25 30	3	6	1.5	0.3
	6	-0.012	12 15 20 25 30 35 40 45 50	4	8	2.0	0.5
	8		15 20 25 30 35 40 45 50	5			
	10	-0.015	15 20 25 30 35 40 45 50	6	10	2.5	1.0
	12	0.018	30 35 40 45 50				